

LIGHTCORP


SEAMLESS ILLUMINATION

FEATURES AVAILABLE



- Daisy chaining
- High power factor ballast
- Multiple paint options

Designed to tuck beneath an overhead storage unit, Tazetta seamlessly blends in with your desktop. Built with a slim profile and available in a variety of paint options, Tazetta effortlessly matches any workspace aesthetics. It also provides superior illumination distribution with an energy-efficient, fluorescent lamp.

TAZETTA

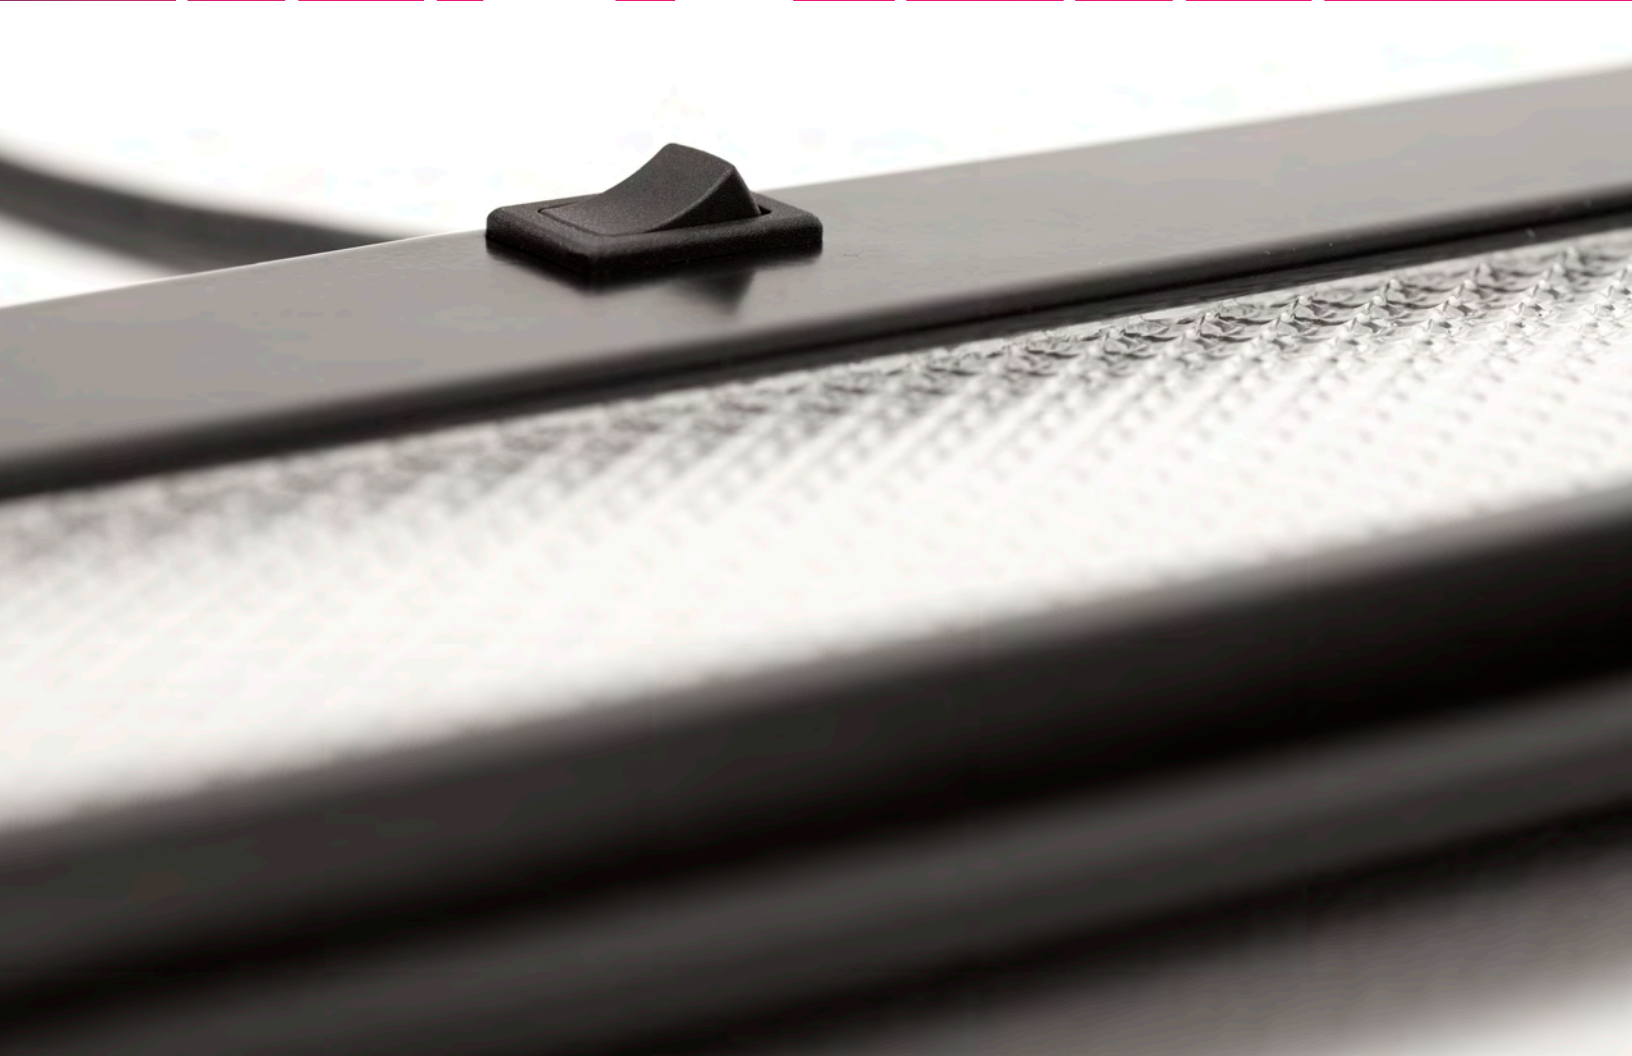

TAZETTA

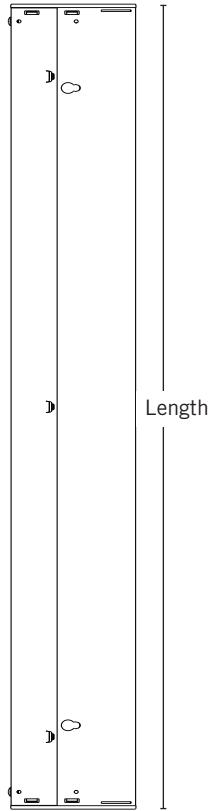

FEATURES

- Allows for daisy chain linking up to five fixtures maximum.

SPECIFICATIONS

Lengths:	24", 36", 48", 60"
Lamp:	T5 fluorescent
Ballast:	NPF
Color temperature:	3500K
Standard colors:	see below
Materials:	powder coated steel and plastic
Lens:	prismatic
Reflector:	UV stable silver
Switch:	two-position black rocker; center
Cord:	9' black cord, 90° SW plug, exit center
Mounting:	keyhole slots or spring bar mount
Certifications:	ETL listed: compliant to UL 153 & CSA C22.2 No. 250.4; UL 1598; TAA; BAA (varies per options selected)
Warranty:	3 years, excluding lamps

	Suggested Shelf Size	Actual Length	Wattage
24" fixture	30"–36"	23.3"	14
36" fixture	42"–48"	35.1"	21
48" fixture	54"–60"	46.9"	28
60" fixture	> 72"	58.7"	35

COLOR FINISH OPTIONS

- | | | |
|--|---|---|
| <p>NEUTRAL:
Sand 074
White 003
Soft White 061</p> <p>GRAY:
Silver Star 077</p> | <p>DARK:
Black 078
Charcoal 066</p> <p>METALLIC:
Metallic Champagne 138
Metallic Charcoal 021
Metallic Silver 058</p> | <ul style="list-style-type: none"> • Non-standard finish colors available for an extra charge. See the Products and Specifications Guide for a complete listing. • When specifying metallic colors, note that the end caps will be a non-metallic accent color. |
|--|---|---|

SPECIFYING NOTES

- The starter power and master control fixtures are supplied with a 9' 18-gauge power cord with a 90° SW rotation fused plug. Both cords exit from the center of the fixture.
- Cord and power switch location on 24" fixture is left of center.
- Cords are not field exchangeable.
- The starter power fixture is available with a 90°, SW rotation fused plug only.
- One cord manager is included with each fixture, two cord managers included with each daisy chain fixture.
- When specifying the daisy chain option, specify one power cord fixture and up to three jumper cord fixtures and one end fixture—maximum total of five fixtures.
- The end line jumper cord has one jumper cord with male plug to complete daisy chain run. Length of jumper cord must be specified.
- The daisy chain cord needs 3" of clearance from cord exit to wall for avoidance of cord damage.



Environmental considerations:

- ELE high power factor (high performance) electronic ballast for increased efficiency.

ORDERING INFORMATION

TAZETTA

	DESCRIPTION	CODE
Step 1: Select length	24" fixture	MT5 24
	36" fixture	MT5 36
	48" fixture	MT5 48
	60" fixture	MT5 60
Step 2: Select color	Standard color finish	+.3-digit color code
	Non-standard color finish	
Step 3: Add options	3000K lamp	+.TRI30
	4100K lamp	+.TRI41
	High power factor electronic ballast	+.ELE
	Left cord exit	+.LH
	Right cord exit	+.RH
	Hardwire	+.HW
	Straight plughead	+.SP
	Independent switch	+.DCP
	Master control	+.MCDCP
	45" jumper cord	+.DCJ45
	56" jumper cord	+.DCJ56
	76" jumper cord	+.DCJ76
	24" end line jumper	+.DCE24
	45" end line jumper	+.DCE45
	56" end line jumper	+.DCE56
	76" end line jumper	+.DCE76
	Linear prismatic batwing lens	+.BW
Fused plug; SW rotation (Chicago city code)	+.CHC9SW	
Step 4: Select mounting	Keyhole slots	
	Spring bar mount*	+.system code

NOTE:

*A system mounting code must be specified for spring bar mount. Please call customer service at 800.544.4899 for details.

OPTIONS	DESCRIPTION	CODE
Cord managers	horizontal cord manager	CM1
	qty. 2, 2" vertical cord managers	CM2
	12" vertical cord manager	CM3
	qty. 50, horizontal cord managers	CM4