



TUCK

TAILORED BRILLIANCE

With four length options and interlinking capabilities, Tuck creates customized lighting solutions for any space. Designed to attach directly beneath underbin cabinetry, its slim profile mounts effortlessly and inconspicuously below cabinets and shelving to provide superb quality illumination exactly where it's needed. Its capacitive touch dimming feature with last state memory allows the user to further tailor its intensity to adjust to any specific task with ease.

FEATURES AVAILABLE

- Interlinkable
- Dimming
- Automatic turn off




TUCK

FEATURES

- Interlink multiple fixtures with 18" interconnect cord.
- Customize light output with the touch-and-hold dimming feature.

SPECIFICATIONS

Lengths:	12", 17", 31", 44"
LED rated lifespan:	> 52,000 hours
Color temperature:	3500K
Color rendering index:	85
Brightness adjustability:	100%—15% continuous; with last state memory (when powered)
Automatic turn off:	after 12 hours (± 15 mins.)
Standard color:	silver with black endcaps
Materials:	anodized aluminum and plastic
Lens:	frosted
Power supply:	18-watt wall transformer with 9' black cord, 60-watt wall transformer with 11' black cord
Mounting:	includes magnet and screw mounts
Certifications:	ETL listed: compliant to UL 153 & CSA C22.2 No. 250.4; FCC Part 15 Class B; CEC Title 20
Warranty:	5 years fixture; 1 year power supply

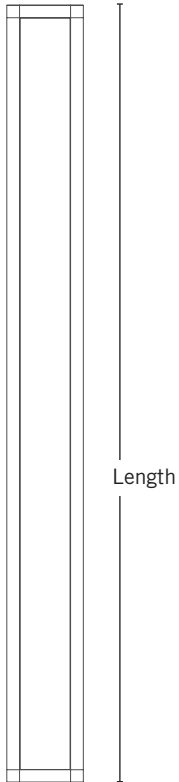

	Suggested Shelf Size	Total Length*	# of LEDs	Lumens	FC**	Wattage	System	Max # Interlink
12" Fixture	< 24"	13.6"	36	315	54	4.4	5.0	6
17" Fixture	24"—36"	18.6"	54	457	73	5.6	6.4	4
31" Fixture	42"—48"	32.6"	90	914	105	10.3	11.89	3
44" Fixture	54"—60"	45.6"	132	1289	111	14.3	16.23	2

SPECIFYING NOTES

- Use the chart on the next page to determine the acceptable Tuck interlink combinations.
- If connecting multiple sizes, contact customer service for interlink recommendations.
- Cannot interlink with any other fixture family.
- All interlinked fixtures are controlled by the on/off/dimmer pack on the starter fixture.
- Stand alone kits come standard with one light fixture, one on/off/dimmer pack, one 18-watt power supply, magnet/screw mounts and two CMAD cord managers.
- Fixture starter kits come standard with one light fixture, one on/off/dimmer pack, one 60-watt power supply, magnet/screw mounts and two CMAD cord managers.
- Fixture adder kits come standard with one light fixture, one 18" interlink cord, magnet/screw mounts and two CMAD cord managers.



Environmental considerations:

- Made with fully-recyclable aluminum and plastic
- Lower power consumption
- Mercury-free LEDs
- LEED credit eligibility


*Total length represents the fixture plus the on/off/dimmer pack.

**FC = footcandles @ 18" from work surface. Footcandle plots are available at www.lightcorp.com/products/under-shelf/tuck.

		DESCRIPTION	CODE
Stand alone fixtures	Step 1: Select length	12" stand alone fixture	TUCK.12.SGL.18PS.LC
		17" stand alone fixture	TUCK.17.SGL.18PS.LC
		31" stand alone fixture	TUCK.31.SGL.18PS.LC
		44" stand alone fixture	TUCK.44.SGL.18PS.LC

		DESCRIPTION	CODE
Interlinked configurations	Step 1: Select starter length	12" fixture starter	TUCK.12.DCP.60PS.LC
		17" fixture starter	TUCK.17.DCP.60PS.LC
		31" fixture starter	TUCK.31.DCP.60PS.LC
		44" fixture starter	TUCK.44.DCP.60PS.LC
	Step 2: Select adder length	12" fixture adder	TUCK.12.DCA.0PS.LC
		17" fixture adder	TUCK.17.DCA.0PS.LC
		31" fixture adder	TUCK.31.DCA.0PS.LC
		44" fixture adder	TUCK.44.DCA.0PS.LC

OPTIONS	DESCRIPTION	CODE
Accessories	Interlink	18" interlink cord (included w/ each adder fixture) ICT18
	Power supplies	18-watt power supply, 9' cord, straight plug RPS18
		60-watt power supply, 11' cord, straight plug RPS60
	Cord managers	qty. 2 magnetic horizontal cord managers CMMM
		qty. 2 adhesive horizontal cord managers CMAD
		qty. 2 vertical plastic clip cord managers CMPC

 **WARNING:** This product may expose you to chemicals including di(2-ethylhexyl) phthalate (DEHP), lead and/or titanium dioxide which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

INTERLINK CHART

	12"	17"	31"	44"
6	0	0	0	0
5	1	0	0	0
5	0	0	0	0
4	2	0	0	0
4	1	0	0	0
4	0	1	0	0
4	0	0	0	0
3	2	0	0	0
3	1	1	0	0
3	1	0	0	0
3	0	1	0	0
3	0	0	0	1
3	0	0	0	0
2	3	0	0	0
2	2	1	0	0
2	1	1	0	0
2	0	2	0	0
2	0	0	0	1
1	4	0	0	0
1	3	0	0	0
1	2	1	0	0
1	2	0	0	1
1	1	1	0	0
1	1	0	0	1
0	4	0	0	0
0	3	1	0	0
0	3	0	0	0
0	2	1	0	0
0	2	0	0	1
0	1	2	0	0
0	1	1	1	1
0	1	0	0	1
0	0	3	0	0
0	0	2	0	0
0	0	1	1	1
0	0	0	0	2