

Mumbo

[MU LED]



Specifications

Lamp

9.0 system watt LED, 3500K LED standard.

Power Supply

700 MA constant current class II or LPS rated - certified

Cord

9' cord from fixture to power supply.
8' cord with molded straight plug and detachable power supply.
12' coiled cord with optional dimming module.

Cord Color

Black

Switch

Silver toggle switch on head

Optic

Conditioning optic w/diffuser - resulting in single shadowing

Arm

Single-articulating arm

Mounting (must specify)

Freestanding weighted base
Clamp - minimum clearance
Clamp - waterfall edge
Panel
Surface
Railite™
Magnetic

Finish

Silver arm with black or white head and base

Dimming

Optional independent slide control dimming module with 100% - 15% range. Connects with surface mounting bracket.

Sensor


Optional Isolé eight outlet power strip with remote occupancy sensor control of six outlets, LED grounding indication, and on/off switching. (See Isolé cut sheet for specifications).

Certifications

UL, cUL

Recyclability

93% Recyclable

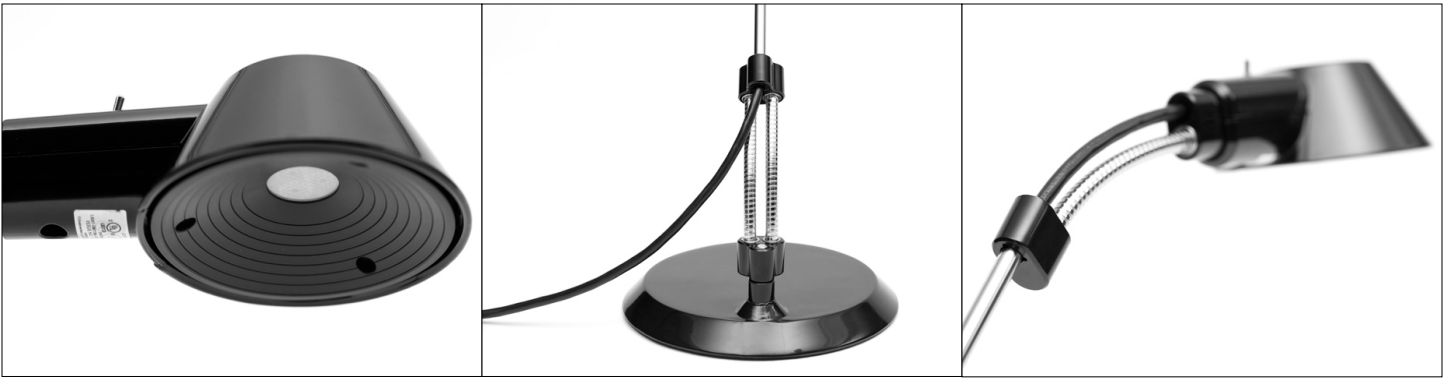


Base Models

Base Number	Wattage
MU S LED	9 system 6.5 fixture 2.17 per LED


The **Mumbo S LED** personal task light is an adjustable LED product consuming minimal levels of power, yet delivering warm 3500K illumination. This LED fixture adjusts to place a single shadowing, large pool of light where the user desires, with a flexible 18" articulating arm and five mounting choices. Available in white or black finish with chrome arms, the Mumbo is a cost effective solution for both open and private offices. Warranted for 5 years.

Footcandles ISO Plot

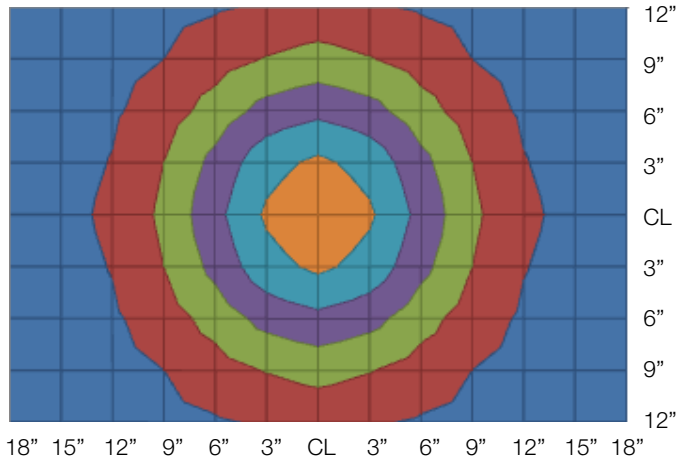

Performance Test Installation Data

Base Number	MU S LED
Light Source	LED
Number of LEDs	3
Power Supply	700mA constant current, class II or LPS
Power Factor	NPF
Optic	conditioning optic w/diffuser
Measured Plane	36" length x 24" width
Face of Light to Work Surface	15"

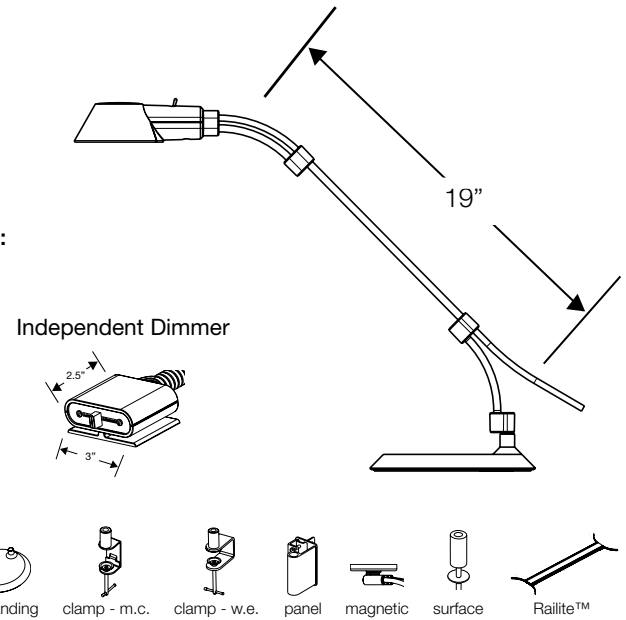

Footcandles Source at 15"

	18"	15"	12"	9"	6"	3"	CL	3"	6"	9"	12"	15"	18"
12"	4	6	8	13	18	22	26	22	18	13	8	6	4
9"	5	8	12	20	31	41	47	41	31	20	12	8	5
6"	6	10	17	30	48	67	75	67	48	30	17	10	6
3"	7	12	21	40	66	93	104	93	66	40	21	12	7
CL	7	14	14	44	74	103	115	103	74	44	24	14	7
3"	7	12	21	40	66	93	104	93	66	40	21	12	7
6"	6	10	17	30	48	67	75	67	48	30	17	10	6
9"	5	8	12	20	31	41	47	41	31	20	12	8	5
12"	4	6	8	13	18	22	26	22	18	13	8	6	4

Mumbo MU Recyclability

