

LIGHTCORP

CLIQUE

Clique is comprised of compact, modular units designed to easily connect to one another. It is available in four sizes; 12", 22", 32", and 42" lengths—and with an 18-watt wall transformer allowing for effortless cord management.

FEATURES

- Modular design



CLIQUE

SPECIFICATIONS

LENGTHS:

12", 22", 32", 42"

ENERGY CONSUMPTION:

see chart below

NUMBER OF LEDS:

see chart below

LIGHT OUTPUT:

see chart below

PEAK FOOTCANDLES:

see charts next page

LED RATED LIFESPAN:

> 60,000 hours

COLOR TEMPERATURE:

3500K

COLOR RENDERING

INDEX:

83

POWER SUPPLY:

18-watt wall transformer with 9' cord

CORD COLOR:

black

MATERIAL:

plastic

MOUNTING:

includes magnet and screw mounts


CERTIFICATIONS:

ETL listed: compliant to UL 153/8750 & CSA C22.2 No. 250.4; FCC Part 15 Class B; TAA; BAA; CEC Title 20

WARRANTY:

5 years fixture
5 years power supply

DIMENSIONS

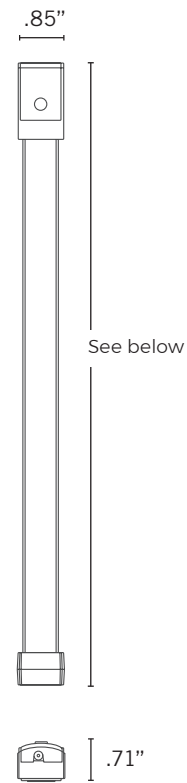

	# LEDS	LUMENS	WATTAGE	SYSTEM WATTAGE
12"	12	324	5.0	5.1
22"	24	639	9.0	9.8
32"	36	951	12.0	14.12
42"	48	1244	16.0	18.15

PHOTOMETRIC DATA

Footcandle outputs measured at 18" from the work surface.

12" Fixture

	18"	12"	6"	CL	6"	12"	18"
12"	8	14	20	23	20	14	8
6"	11	21	36	43	36	21	11
CL	12	26	44	54	44	26	12
6"	11	21	36	43	36	21	11
12"	8	14	20	23	20	14	8

32" Fixture

	18"	12"	6"	CL	6"	12"	18"
12"	35	45	50	52	50	45	35
6"	58	76	85	87	85	76	58
CL	72	94	105	108	105	94	72
6"	58	76	85	87	85	76	58
12"	35	45	50	52	50	45	35

22" Fixture

	18"	12"	6"	CL	6"	12"	18"
12"	20	31	39	42	39	31	20
6"	32	52	69	75	69	52	32
CL	38	65	87	94	87	65	38
6"	32	52	69	75	69	52	32
12"	20	31	39	42	39	31	20




42" Fixture

	18"	12"	6"	CL	6"	12"	18"
12"	49	55	58	58	58	55	49
6"	83	91	95	96	95	91	83
CL	102	113	117	118	117	113	102
6"	83	91	95	96	95	91	83
12"	49	55	58	58	58	55	49

FINISH

SILVER

ACCESSORIES

		
Magnetic horizontal cord manager	Panel clip cord manager	Adhesive horizontal cord manager

SPECIFYING NOTES

- Each fixture includes one end cap to enclose the open end of the fixture, 2 adhesive cord managers and mounting screws.
- Mounting magnets and keyhole slots are integrated into the fixture for most mounting applications.
- Maximum 4 modular segments connected per 18-watt power supply.
- Individual adder unit does not include end cap.
- Individual adder units cannot be added to the 42" fixture.
- White power supply and cord available upon request by calling Inside Sales at 800.526.5658.
- Additional cord managers are available for purchase.
- Do not interlink with any other fixture family.

SUSTAINABILITY NOTES

- Made with fully-recyclable plastic. Please contact your local county or municipality to determine your local recycling options.
- Lower power consumption
- Mercury-free
- Potential LEED points. For more LEED information please visit <https://new.usgbc.org/leed-v41>