

TUCK

Designed to attach directly beneath underbin cabinetry, Tuck's slim profile adheres effortlessly and inconspicuously below cabinets or shelving to supplement work surfaces with superb illumination. With four interlinkable lengths and capacitive touch dimming, Tuck can be tailored to meet to any specific task with ease.

FEATURES

- Interlinkable
- Master control
- Continuous dimming
- Auto shut-off



TUCK

SPECIFICATIONS

LENGTHS:

12", 17", 31", 44"

ENERGY CONSUMPTION:

see chart below

NUMBER OF LEDES:

see chart below

LIGHT OUTPUT:

see chart below

PEAK FOOTCANDLES:

see charts next page

LED RATED LIFESPAN:

> 52,000 hours

COLOR TEMPERATURE:

3500K

COLOR RENDERING INDEX:

85

DIMMING

100%-15% continuous

AUTO SHUT OFF:

after 12 hours (± 15 mins.)

POWER SUPPLY:

18-watt wall transformer with 9' cord or 40-watt wall transformer with 11" cord

CORD COLOR:

black

MATERIAL:

anodized aluminum and plastic

MOUNTING:

includes magnet and screw mounts


CERTIFICATIONS:

ETL listed: compliant to UL 153 & CSA C22.2 No. 250.4; FCC Part 15 Class B; CEC Title 20

WARRANTY:

5 years fixture
1 year power supply

DIMENSIONS

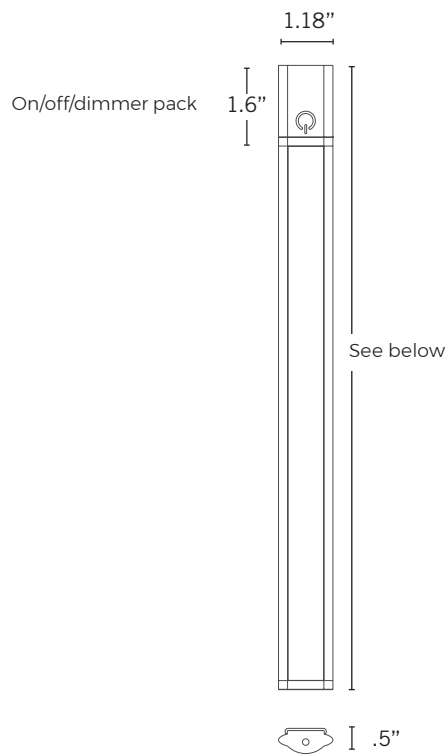

	# LEDES	LUMENS	WATTAGE	SYSTEM WATTAGE	ACTUAL LENGTH*	SUGGESTED SHELF SIZE
12"	36	375	3.8	5.0	13.6"	< 24"
17"	54	510	5.6	6.3	18.6"	24" – 36"
31"	90	961	10.3	11.75	32.6"	42" – 48"
44"	132	1313	14.3	16.19	45.6"	54" – 60"

*Total length represents the fixture plus the on/off/dimmer pack.

PHOTOMETRIC DATA

Footcandle outputs measured at 18" from the work surface.

12" Fixture

	18"	12"	6"	CL	6"	12"	18"
12"	6	11	18	21	18	12	6
6"	9	19	34	42	34	19	9
CL	10	22	43	55	43	23	10
6"	8	18	32	40	32	18	8
12"	6	11	17	20	17	11	6

31" Fixture

	18"	12"	6"	CL	6"	12"	18"
12"	23	35	43	46	43	35	23
6"	38	63	80	85	79	61	38
CL	47	80	102	108	101	78	46
6"	37	60	77	81	76	60	37
12"	22	33	41	44	41	33	22

17" Fixture

	18"	12"	6"	CL	6"	12"	18"
12"	10	17	26	30	26	17	10
6"	14	30	49	59	49	29	14
CL	16	36	63	76	63	36	17
6"	14	28	47	56	47	28	14
12"	9	16	24	28	25	17	10




44" Fixture

	18"	12"	6"	CL	6"	12"	18"
12"	36	44	49	50	49	44	35
6"	65	82	89	91	87	79	62
CL	85	107	115	117	113	102	80
6"	66	82	90	91	88	79	62
12"	36	44	49	50	49	44	35

FINISH

SILVER

ACCESSORIES

		
Magnetic horizontal cord manager	Panel clip cord manager	Adhesive horizontal cord manager

ABOUT INTERLINKING

The Tuck interlink process utilizes master control which means the first fixture in the string controls the power for all subsequent linked fixtures.

- When connecting a string of Tuck fixtures, the total interlinked system wattage cannot exceed 36 watts. Refer to the chart below for acceptable combinations.
- Do not interlink with any other fixture family.

12"	17"	31"	44"	17"	24"	31"	44"
6	0	0	0	0	2	0	1
5	1	0	0	0	1	2	0
5	0	0	0	0	1	1	1
4	2	0	0	0	1	0	1
4	1	0	0	0	0	3	0
4	0	1	0	0	0	2	0
4	0	0	0	0	0	1	1
3	2	0	0	0	0	0	2
3	1	1	0				
3	1	0	0				
3	0	1	0				
3	0	0	1				
3	0	0	0				
2	3	0	0				
2	2	1	0				
2	1	1	0				
2	0	2	0				
2	0	0	1				
1	4	0	0				
1	3	0	0				
1	2	1	0				
1	1	1	0				
1	1	0	1				
0	4	0	0				
0	3	1	0				
0	3	0	0				
0	2	1	0				

SPECIFYING NOTES

- Stand alone fixtures include one light fixture, one on/off/dimmer pack, one 18-watt power supply, magnet and screw mounts and two adhesive horizontal cord managers.
- Starter fixtures include one light fixture, one on/off/dimmer pack, one 40-watt power supply, magnet and screw mounts and two adhesive horizontal cord managers.
- Adder fixtures include one light fixture, one 18" interlink cord, magnet and screw mounts and two adhesive horizontal cord managers.
- A 40-watt power supply is required when interlinking.
- Additional cord managers are available for purchase.

SUSTAINABILITY NOTES

- Made with fully-recyclable anodized aluminum and plastic. Please contact your local county or municipality to determine your local recycling options.
- Energy-saving features such as auto shut-off and dimming included.
- Lower power consumption
- Mercury-free
- Potential LEED points. For more LEED information please visit <https://new.usgbc.org/leed-v41>