

Reed Premier

Under Shelf Light

- Choose from 5 Interlinkable lengths and 2 finishes
- Available in standard or high output for lab environments
- Optional integrated or modular occupancy sensor that turns fixture off after 30 minutes of inactivity and back on upon sensing movement
- Continuous dimming with last state memory
- Auto shut-off after 10 hours ($\pm$ 15 mins.)



Reed Premier Under Shelf Light


RP.17.SO RP.17.HO
RP.24.SO RP.24.HO
RP.31.SO RP.31.HO
RP.44.SO RP.44.HO
RP.58.SO RP.58.HO




Lengths	17", 24", 31", 44", and 58"
Output	see chart below
CRI	92
Color Temperature	3500K
Average Rated Life	> 50,000 hours
Dimming	100% - 15% continuous
Auto Shut-off	after 10 hours (± 15 min.)
Mounting	Mounts for wood/laminate or magnetic application included
Power Supply	18W wall transformer with 9' cord; 60W wall transformer with 11' cord
Wattage	see chart below
Materiality	Fully-recyclable anodized aluminum and plastic
Certifications	ETL listed: compliant to UL 153/8750 & CSA C22.2 No. 250.4; FCC Part 15 Class B; TAA; BAA; UL 2108 CSA C22.2 No. 9 Modular sensor certified UL 153 portable luminaire accessory CSA C22.2 No. 250.4
Warranty	10 years fixture; 5 years power supply

Dimensions

Non-sensor models

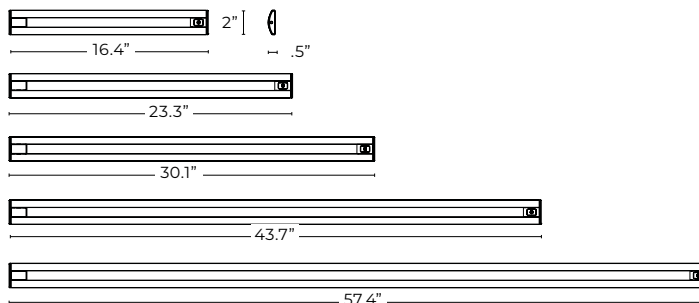

Integrated sensor models

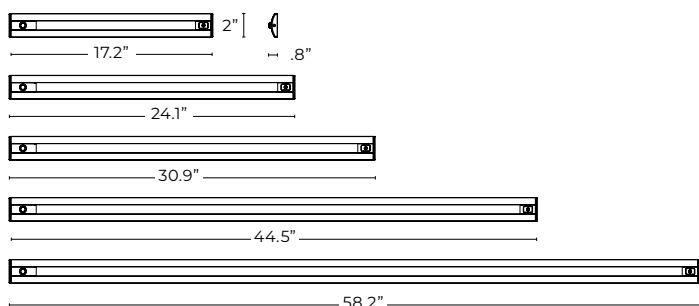

Finishes



	Peak Foot candles		Lumens		Wattage		System Wattage	
	SO	HO	SO	HO	SO	HO	SO	HO
12" fixture	79	132	473	736	5.8	9.5	6.8	10.2
17" fixture	106	171	721	1109	8.6	13.4	9.9	15.7
31" fixture	125	200	970	1438	11.3	17.3	13.1	19.8
44" fixture	141	232	1446	2073	16.8	25.5	19.1	28.1
58" fixture	151	240	1942	2755	22.2	33.1	25.3	38.3

