CLAMP MOUNT VARIATION:

Included in the package:

- Unit
- Thumb Screws (qty. 2)
- Power Supply (Optional)
- Interconnect Cord (Optional)
- 1. Slide unit mount onto edge of surface (Fig. 1).
- 2. Tighten thumbscrews on the underside of the surface (Fig. 2).
- 3. Plug the unit into the power source using either the power supply or interconnect cord included with your kit.

Tools required:

 Pencil • Drill

• Philips Head Screwdriver

• 1/8" Pilot Drill Bit

UNDERSURFACE MOUNT VARIATION:

Included in the package:

- Unit
- Mounting Bracket
- Wood Screws (qty. 3)
- Thumb Nut
- Power Supply (Optional)
- Interconnect Cord (Optional)
- 1. Locate mounting bracket where desired and place a small mark in each slot. Remove bracket.
- 2. Using the pilot drill bit, drill a hole on each mark that is $\frac{1}{2}$ " deep.
- 3. Attach mounting bracket to the underside of the surface utilizing the two slotted holes (Fig. 3). Do not fully tighten screws.
- 4. Align bracket to final desired position and drive the third screw thru the remaining hole (Fig. 4). Tighten all screws.
- 5. Feed unit thru the mounting bracket making sure to pass the threaded stud thru the hole in the back of the bracket (Fig. 5).
- 6. Fix the unit in place with the provided thumb nut (Fig. 6).
- 7. Plug the unit into the power source using either the power supply or interconnect cord included with your kit.

IN-SURFACE MOUNT* VARIATION:


Included in the package:

Tools required: • 1-11/16" Hole Saw


• Jig Saw


- Unit Mount
- Thumb Nut
- Power Supply (Optional)
- Interconnect Cord (Optional)
- 1. Identify the desired location for the unit.
- 2. Using a hole saw, cut out the respective shape below into the surface:








3. Feed unit thru the cutout (Fig. 7).











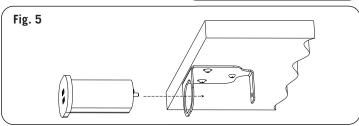





^{*} In-Surface mount can be installed in either a horizontal or vertical surface.

IN-SURFACE MOUNT VARIATION CONT .:

- 4. From the back side, slide the mounting bracket over the unit, making sure to pass the threaded stud thru the hole in the bracket. Fix the unit in place with the provided thumb nut (Fig. 8).
- 5. Plug the unit into the power source using either the power supply or interconnect cord included with your kit (Fig. 9).



No user serviceable parts.

CAUTION: To reduce the risk of electric shock - use only indoors. CAUTION: Use only in dry locations.

ATTENTION: Pour réduire le risque d'électrocution, utilisez uniquement à l'intérieur

ATTENTION: Utiliser uniquement dans des endroits secs.

FCC COMPLIANCE

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This Class A digital apparatus complies with Canadian ICES-003.

Cet appareil numériqué de la classe A est conformé à la norme NMB-003 du Canada.

