


*Power Unit*




W  
E  
N

L / G H T C O R P

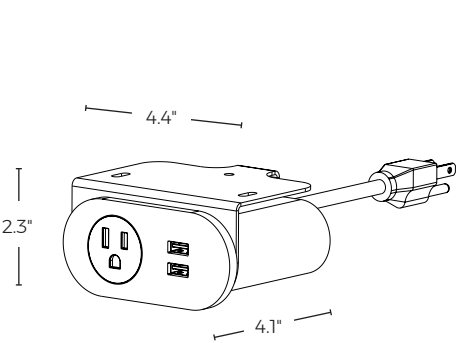

2-tap under-mounted unit

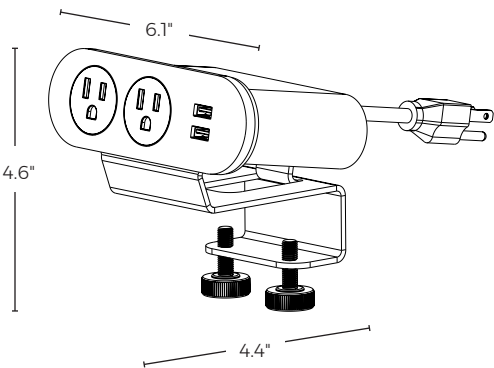

3-tap clamp mounted unit

FEATURES:

- Dozens of color finishes available
- 8 configurations of power ports
- 1.5A and 2.4A USB-A ports
- Supports PD protocol

SPECIFICATIONS:

AC RECEPTACLES	120V; 15A
USB-A CHARGE PORTS	1.5A and 2.4A
USB-C CHARGE PORTS	60W; supports PD protocol
POWER CORD	6' or 10' PVC cord in black or white; straight grounded plug, or optional woven cord in 4 colors with 45° flat/low-profile plug;
HARDWIRE (OPTION)	6' flexible steel, 3-wire conduit; 3/8" diameter
STRAIN RELIEF	straight; 90° also available
MATERIALITY	powder coated aluminum
CERTIFICATIONS	UL962A listed; UL1310 listed power supply; Canada C22.2 308-18; FCC CFR-47 Part 15 Class A; TAA; USB ports compliant to USB-IF BC 1.2
WARRANTY	2 years


DIMENSIONS:

	2-tap unit			3-tap unit		
	W	H	D	W	H	D
In-surface mount	4.4"	3.3"	3.7"	6.1"	3.3"	3.7"
Under mount	4.4"	2.3"	4.1"	6.1"	2.3"	4.1"
Clamp mount	4.4"	4.6"	4.4"	6.1"	4.6"	4.4"

MOUNTING:

Nik is available in under mount, in-surface mount, or clamp mount.

CONFIGURATIONS:

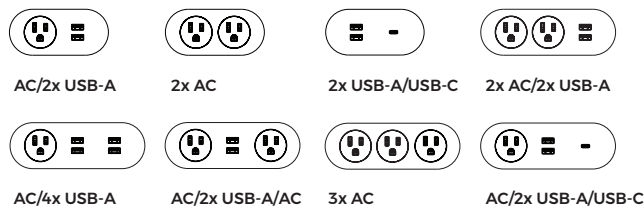

SUSTAINABILITY NOTES:

- Made with fully-recyclable aluminum and plastic. Please contact your local county or municipality to determine your local recycling options.

## FINISHES:

ASH	BLACK	CAYENNE	CLAY
CLEMENTINE	COAL	CRANBERRY	CURRENT
DIJON	EGGPLANT	FLAX	GOLDENROD
GRAPE	GULF	JUNIPER	KIWI
MARINE	MERLOT	METALLIC SILVER	OCEAN
PAPRIKA	PINEAPPLE	PORCELAIN	PUMPKIN
RAISIN	SALMON	SILVER SAGE	SKY
SPRUCE	STORM	TEAL	TRANQUIL
WHITE			

## AC RECEPTACLE COLORS:

BLACK	LINEN	WHITE
-------	-------	-------

## CORD COLORS:

BLACK PVC	WHITE PVC	IVORY WOVEN	GRAPHITE WOVEN
INDIGO WOVEN	YELLOW WOVEN		

## SPECIFICATION NOTES:

- Each unit Includes two cord managers. Additional cord managers are available for purchase.
- If selecting hardwire option for Nik, please note that the backplate is available in black only.
- AC receptacles can be specified with the default south orientation (ground pin down), or specified to be rotated north-facing (ground pin up), east-facing (ground pin on the right), or west-facing (ground pin on the left).
- Straight strain relief is standard. A 90° angle is also available. Please contact Inside Sales at 800.526.5658 to specify.
- AC receptacles are not able to be custom painted.
- Not intended for interlinking. Plugging other power units or extension cords into the AC receptacles may violate your local electrical code.
- The clamp mount applies to surfaces 0.75"-1.25" thick.
- Clamp mount does not extend beyond the back edge of the work surface.
- The in-surface mount is applicable to surfaces 0.75"-1.25" thick. For applications requiring a larger depth, please contact Inside Sales at 800.526.5658.