



Desk Light



L / G H T C O R P

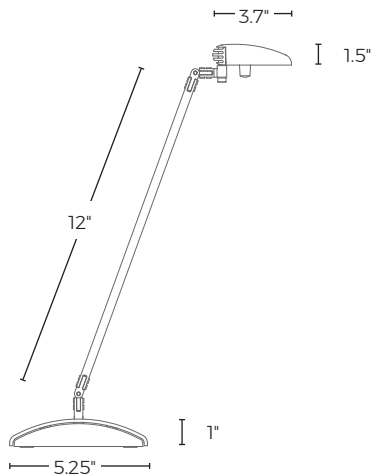

Freestanding, surface, and
clamp mount models

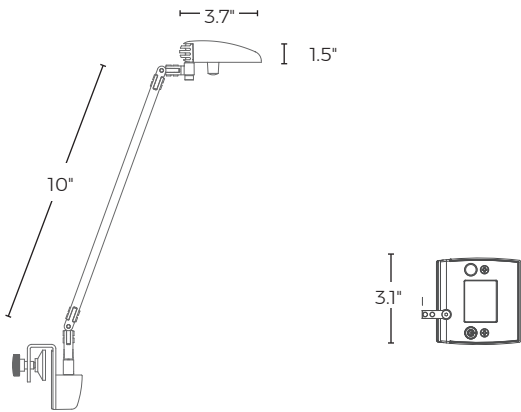

Panel, slatwall, divider, and
monitor mount models

FEATURES:

- Dozens of color finishes available
- Asymmetrical illumination projects light a full foot forward from the base
- Occupancy sensor turns fixture off after 30 minutes of inactivity and back on after sensing movement
- Continuous dimming with last state memory
- Monitor mount option

DIMENSIONS:

	W	H	D
TINO	5.25"	14.9"	9.25"

SPECIFICATIONS:

ENERGY CONSUMPTION	3.9 system watts
NUMBER OF LEDS	7 fractional LEDs
LIGHT OUTPUT	200 lumens
LED RATED LIFESPAN	> 50,000 hours
COLOR TEMPERATURE	3500K
COLOR RENDERING INDEX	82
BRIGHTNESS ADJUSTABILITY	100%-15%; continuous
POWER SUPPLY	18-watt wall transformer with 9' black cord
CORD	3' silver cord with quick connector
MATERIALITY	aluminum, zinc, and plastic
CERTIFICATIONS	ETL listed: compliant to UL 153/8750 & CSA C22.2 No. 250.4; FCC Part 15 Class B; TAA; BAA
WARRANTY	10 years fixture; 5 years power supply

SUSTAINABILITY NOTES:

- Made with fully-recyclable aluminum, zinc, and plastic. Please contact your local county or municipality to determine your local recycling options.
- Energy-saving features such as occupancy sensor and dimming included;
- Lower power consumption
- Mercury-free
- Potential LEED points. For more LEED information please visit <https://new.usgbc.org/leed-v4>

MOUNTING:

Tino is available with a freestanding base, slatwall mount, panel mount, clamp mount, rail mount, divider mount, surface mount, and monitor mount.

- The clamp mount applies to surfaces 0.9"-1.875" thick.
- The monitor mount fits most 15"-17" displays with a standard VESA mounting pattern (100mm x 10mm and 75mm x 75mm).
- The rail mount works with rail systems with a .375" opening.
- The divider mount can be applied to dividers ranging in depth from .25"-.375" and .5"-1.5"
- When specifying panel mount or slat wall mount, the office furniture system must be specified. Please call Inside Sales at 800.526.5658 for system mounting availability.

PHOTOMETRIC DATA:

Footcandle outputs measured at 15" from the work surface.

	12"	9"	6"	3"	CL	3"	6"	9"	12"
12"	21	36	56	70	75	69	55	37	21
9"	26	47	73	96	103	96	75	50	26
6"	23	40	64	80	88	83	66	43	24
3"	15	25	40	53	60	55	42	26	15
CL	9	14	21	28	31	29	24	15	9

FINISHES:

ASH	BLACK	CAYENNE	CLAY
CLEMENTINE	COAL	CRANBERRY	CURRANT
DIJON	EGGPLANT	FLAX	GOLDENROD
GRAPE	GULF	JUNIPER	KIWI
MARINE	MERLOT	METALLIC SILVER	OCEAN
PAPRIKA	PINEAPPLE	PORCELAIN	PUMPKIN
RAISIN	SALMON	SILVER SAGE	SKY
SPRUCE	STORM	TEAL	TRANQUIL
WHITE			