


LIGHTCORP

# MLED

Designed to stow beneath an overhead storage unit, MLED seamlessly blends in with your workspace. Built with an integrated power supply, installation is effortless. Available in a plethora of color finish options to match any workspace aesthetic.

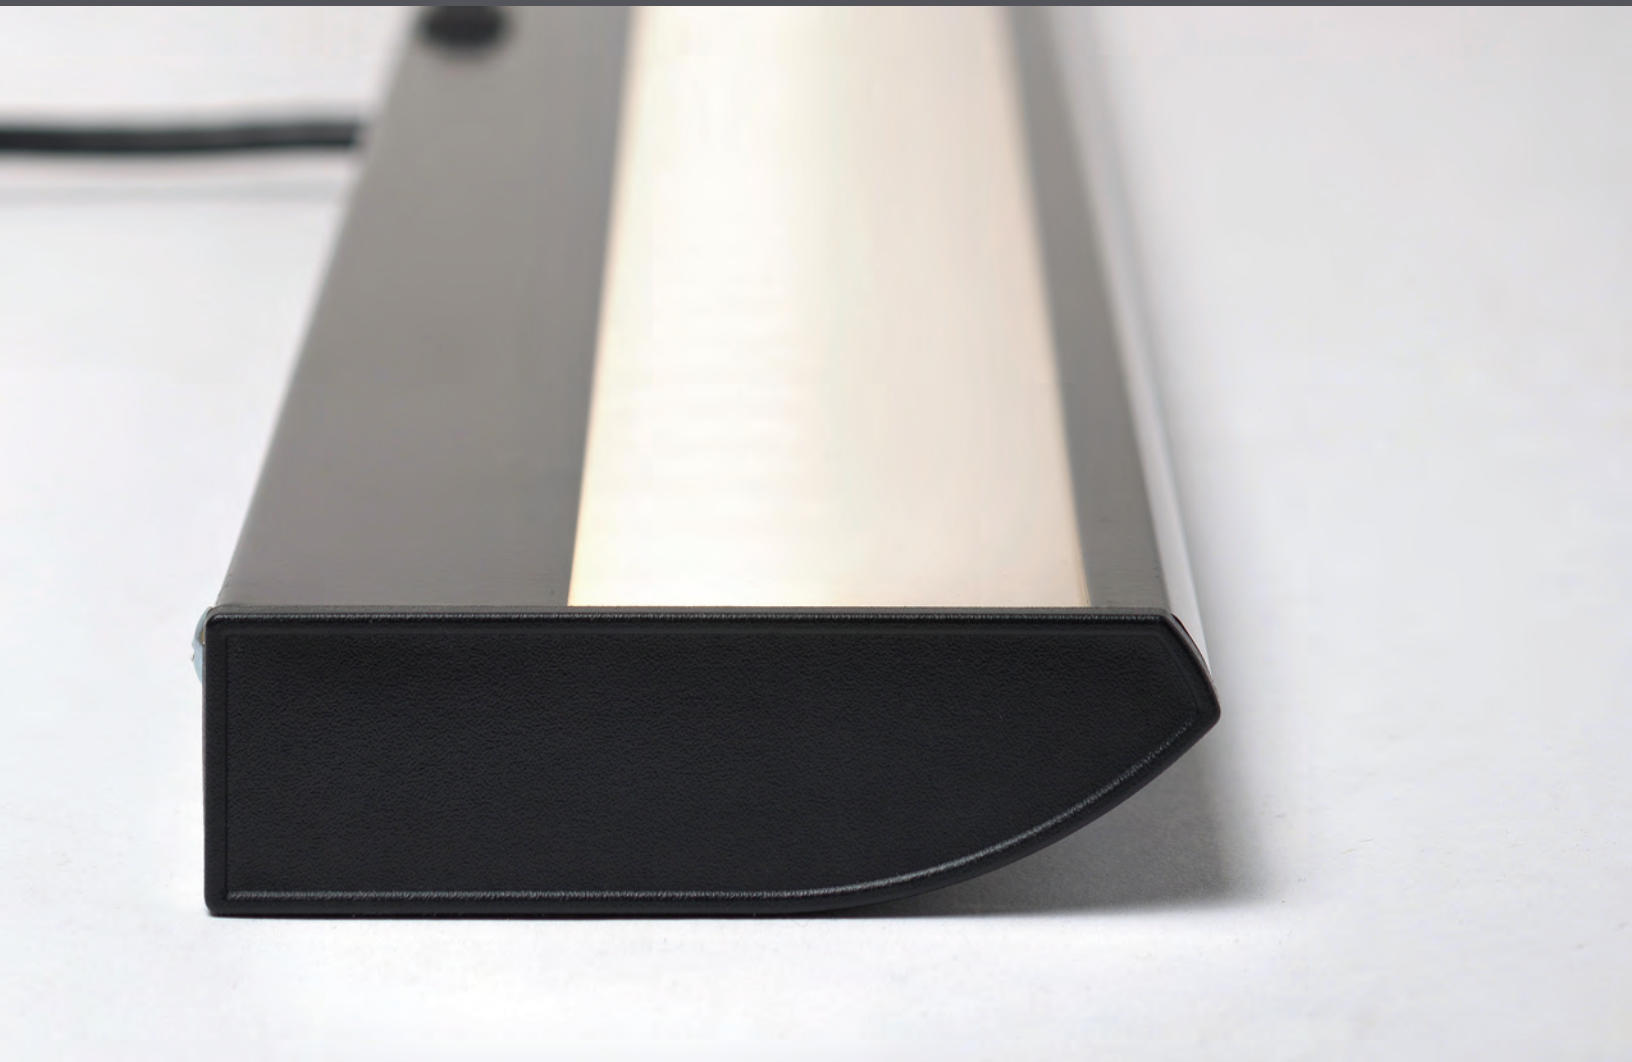

# MLED Under Shelf Light

## FEATURES

- The integrated AC power means there's no unsightly power brick to manage.
- The optional occupancy sensor will turn the fixture off after 30 minutes of inactivity and back on as the user re-enters the workspace. If occupant is present, the light will remain on.
- Additional finishes and custom matching available. Please contact Inside Sales at 800.526.5658 to learn more.

## SPECIFICATIONS

**LENGTHS:**  
24", 36", 45"

**LED RATED LIFESPAN:**  
> 36,000 hours

**COLOR TEMPERATURE:**  
3500K

**COLOR RENDERING INDEX:**  
80+

**LENS:**  
high-efficiency frosted lens

**CORD:**  
9' black, 90° SW plug

**MATERIAL:**  
powder coated steel and plastic


**MOUNTING:**  
choose from magnet, screw or spring bar mount

**WARRANTY:**  
5 years


**CERTIFICATIONS:**  
ETL listed: compliant to UL 153/8750 & CSA C22.2 No. 250.4; FCC Part 15 Class B; TAA; BAA (varies per options selected); CEC Title 20

	<u>24"</u>	<u>36"</u>	<u>45"</u>
<b># LEDS:</b>	22	33	44
<b>LUMENS:</b>	518	800	1106
<b>WATTAGE:</b>	9.02	13.5	18.5

## FINISHES

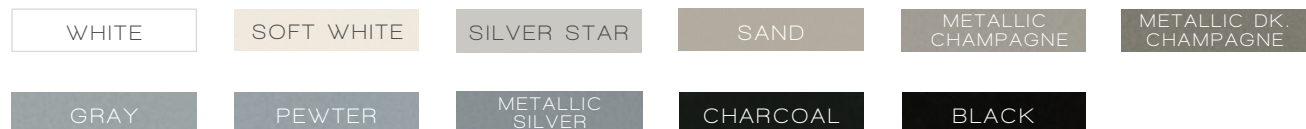

## DIMENSIONS

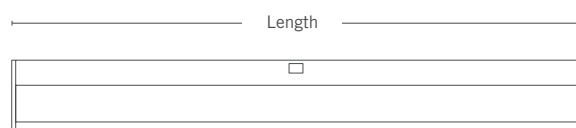

	<u>24"</u>	<u>36"</u>	<u>45"</u>
<b>ACTUAL LENGTH:</b>	23.3"	35.1"	44.3"
<b>SHELF SIZE:</b>	30"-36"	42"-48"	> 48"

# MLED Under Shelf Light

## PHOTOMETRIC DATA

Footcandle outputs measured at 18" from the worksurface.

### 24" Fixture

	18"	12"	6"	CL	6"	12"	18"
12"	26	44	60	67	60	44	26
6"	35	66	97	110	97	66	35
3"	35	69	104	118	104	69	35
CL	31	62	94	<b>107</b>	94	62	31
6"	14	26	37	42	37	26	14

### 36" Fixture

	18"	12"	6"	CL	6"	12"	18"
12"	40	60	74	81	74	60	40
6"	58	91	116	126	116	91	58
3"	61	98	124	134	124	98	61
CL	55	88	112	<b>121</b>	112	88	55
6"	24	36	44	48	44	36	24


### 45" Fixture

	18"	12"	6"	CL	6"	12"	18"
12"	61	80	90	95	90	80	61
6"	93	123	139	145	139	123	93
3"	100	132	149	154	149	132	100
CL	91	121	136	<b>141</b>	136	121	91
6"	38	49	55	57	55	49	38

## SUSTAINABILITY NOTES

- Made with fully-recyclable powder coated steel and plastic. Please contact your local county or municipality to determine your local recycling options.
- Energy-saving occupancy sensor available as an option
- High efficiency frosted lens
- Lower power consumption
- Mercury-free
- Potential LEED points. For more LEED information please visit <https://new.usgbc.org/leed-v41>

## ACCESSORIES



Horizontal Cord Manager



Vertical Cord Manager



12" Vertical Cord Manager

For more information about our products, please visit  
[lightcorp.com](http://lightcorp.com).

We're social!

Instagram and Facebook: @lightcorp

LinkedIn: [linkedin.com/company/light-corporation](https://www.linkedin.com/company/light-corporation)

---

## CONTACT US

### **Factory + Headquarters**

14800 172nd Avenue  
Grand Haven, Michigan 49417

### **For quotes, specifications, or general product inquiries:**

800.526.5658 (option 1)  
[insidesales@lightcorp.com](mailto:insidesales@lightcorp.com)

### **For orders, questions about existing orders, or after sales care:**

800.526.5658 (option 2)  
[customerservice@lightcorp.com](mailto:customerservice@lightcorp.com)

[www.LightCorp.com](http://www.LightCorp.com)